




PRODUCT INFORMATION

DuPont™ ProShield® 60 Coverall. Respirator Fit Hood. Elastic Wrists and Ankles. Storm Flap. Serged Seams. White.

ATTRIBUTES

Full Part Number	NG127SWHxx0025yy (xx=size;yy=option code)
Fabric/Materials	ProShield® 60
Design	Coverall w/ Hood, Elastic Wrists and Ankles
Seam	Serged
Color	White
Quantity/Box	25 per case
Sizes	SM, MD, LG, XL, 2X, 3X, 4X, 5X, 6X, 7X
Option Codes	NP

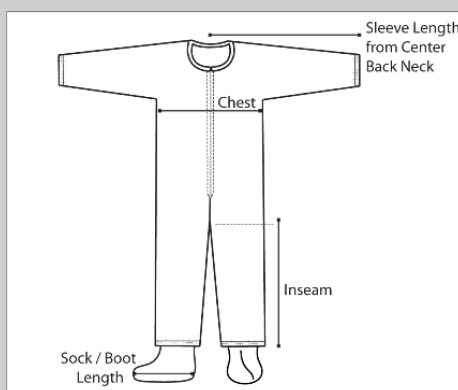

SIZE TABLE

SIZE	SLEEVE LENGTH	CHEST WIDTH	INSEAM	FITS CHEST	FITS HEIGHT
SM	30 3/4	21 1/2	26	29 3/4 - 33 1/4	5'0" - 5'7"
MD	31 3/4	23 1/2	26	33 3/4 - 37 1/4	5'3" - 5'7"
LG	32 3/4	25 1/4	27	37 1/4 - 40 3/4	5'5" - 5'9"
XL	34 1/2	27	27 3/4	40 3/4 - 44 1/4	5'8" - 6'2"
2X	36 1/4	28 3/4	28 1/4	44 1/4 - 47 3/4	6'0" - 6'4"
3X	37	30 1/2	28 3/4	47 3/4 - 51 1/4	6'2" - 6'4"
4X	38	32 1/4	28 3/4	51 1/4 - 54 3/4	6'4" - 6'7"
5X	40	34	29 1/4	54 3/4 - 58 1/4	6'7" - 6'10"
6X	41 3/4	35	30	56 3/4 - 60 1/4	6'9" - 7'1"
7X	43	36 1/2	31	59 3/4 - 63 1/4	7'0" - 7'4"



PHYSICAL PROPERTIES

PROPERTY	TEST METHOD	TYPICAL RESULT
Thickness	ASTM D751	10 mils
Basis Weight	ASTM D751	1.8 oz/yd ²
Tear Resistance - Trap Tear (MD)	ASTM D1117	11 lb _f
Tear Resistance - Trap Tear (CD)	ASTM D1117	7 lb _f
Breaking Strength - Grab (MD)	ASTM D5034	23 lb _f
Breaking Strength - Grab (CD)	ASTM D5034	11 lb _f
Hydrostatic Head	AATCC 127	68 inches H ₂ O
Surface Resistivity (25°C / 55% RH)	ASTM D257	1.0 x 10 ⁹ ohms /square
Wearing Apparel Flammability	16 CFR 1610	Class 1

DuPont™ SafeSPEC™ - We're here to help

Our powerful web-based tool can assist you with finding the appropriate DuPont garments for chemical, controlled environment, thermal and mechanical hazards.



safespec.dupont.com



DuPont Personal Protection
safespec.dupont.com
dpp.dupont.com

DuPont Personal Protection

@DuPontPPE

Connect with us

CREATED ON: JANUARY 22, 2022

© 2021 DuPont. All rights reserved. DuPont™, the DuPont Oval Logo, and all trademarks and service marks denoted with ™, SM or ® are owned by affiliates of DuPont de Nemours, Inc. unless otherwise noted.