

# GRIPPS®

ANSI/ISEA  
121-2018  
COMPLIANT

## H01058 HEAVY DUTY TOOL HITCH 36.0KG

*The Dual Arm Tool-Hitch is suitable for heavy 'open' tools such as crowbars and sledgehammers.*



The Dual Arm Tool-Hitch loops through itself to create a simple yet strong choke. Secure the two arms using V-Gripp tape to stop the Tool-Hitch from sliding up and down the tool.

The tool is then tethered directly to a load rated anchor point via the heavy-duty tool ring on the tail.

79<sub>LB</sub>

36<sub>KG</sub>

MAX LOAD:

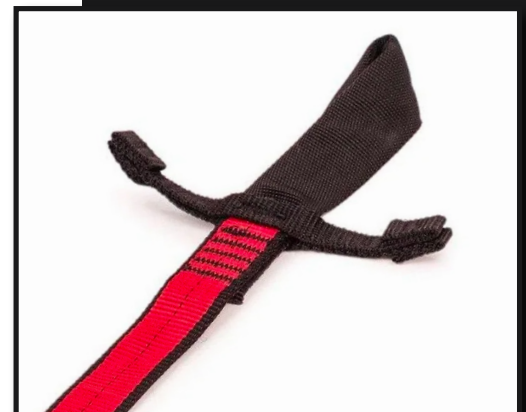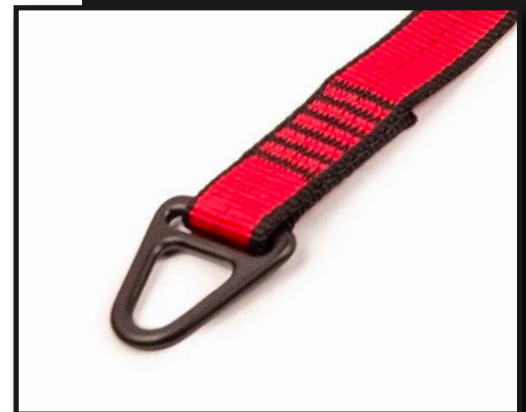

THE LEADERS IN FALLING OBJECT PREVENTION

GRIPPS.COM

## KEY FEATURES

Creates a load rated tool connection point for heavy 'open' tools.

Tactical grade Nylon for maximum strength.

Heavy-duty closed metal D-Ring



## SPECIFICATIONS


SKU

H01058

MAX LOAD


36KG | 79LBS

1




Lay out Tool Hitch flat on ground or a table.

2




Pass one end of the Tool Hitch around the neck (near the tool's center of gravity). Then pass the D-Ring end back through the Tool Hitch loop to create a choke-hold.

3




Apply GRIPPS® V-Gripp Tape to straps/wings of the Tool Hitch. Wrap around 10x times on either side.

4



Test tape effectiveness and pull on Tool Hitch to test strength.

5

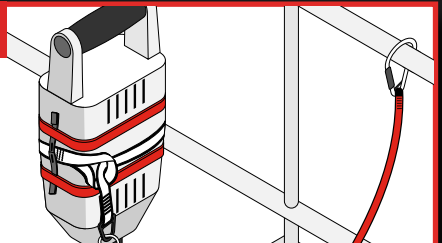

Your Tool Hitch is ready to tether to a suitable anchor point using an appropriate Tool Tether.

@GRIPPSGLOBAL



#ConquerGravity