

# MSA Rescuer



*The MSA Rescuer provides fast, easy and intuitive fall protection with integral bi-directional retrieval capability. Not only does the MSA Rescuer arrest the fall, its retrieval capability allows the fallen worker to ascend or descend to a safe location. This durable, economical product offers fast installation and setup, ideal for applications where time and ease of use are a priority. The MSA Rescuer is also a stand-alone retractable device, as the carrying handle may be used as an anchorage attachment.*

**WE KNOW WHAT'S AT STAKE.**

## MSA Rescuer: Ease of Use, Many Applications

Exclusive integral bracket uses existing tripod pin, leaving fewer components to attach or become damaged or misplaced. Fall protection/retrieval mode knob simply pulls and rotates to activate. Use this device as a component of a confined space system for one application and as a standard self-retracting lanyard for another.

- Experienced and novice users will learn setup and operation quickly and effectively
- Comparable size and weight to competitive products
- Great for OGP turnarounds, construction, utilities, and other confined space applications
- QR code on product label offers instant access to setup video and additional information

### Features & Benefits

**The MSA Rescuer offers these standard features:**


- User capacity up to 400 lbs. for personnel
- Stainless steel 3/16" wire rope
- Integral mounting bracket
- Color-coded switch for retrieval mechanism activation
- Ergonomic, stainless steel carrying handle can also be used as anchorage connection point
- Built-in shock absorber
- Robust aluminum housing with thermoplastic bumpers
- Self-locking swivel snaphook with load indicator
- Stow-able, foldable crank handle
- RFID-enabled
- Meets OSHA regulations, ANSI Z359.14 and CSA Z259.2.2

### Specifications

- **Net weight**  
16.3kg (includes bracket)
- **Crank handle material**  
Carbon steel with zinc plating
- **Housing material**  
Cast aluminum
- **Lifting and lowering gear ratio**  
Gear ratio: 5:1
- **Maximum free fall distance**  
2 ft. (0.6m)
- **Maximum deceleration distance**  
54" (1.4m)
- **Maximum arresting force**  
1800 lbs. (8Kn)

### Ordering Information

P/N	Description
10158178	MSA Rescuer, stainless steel cable, 50 ft. (15m), ANSI
10158180	MSA Rescuer, stainless steel cable, 50 ft. (15m), CSA
10159755	MSA Rescuer, synthetic rope, 50 ft. (15m), ANSI

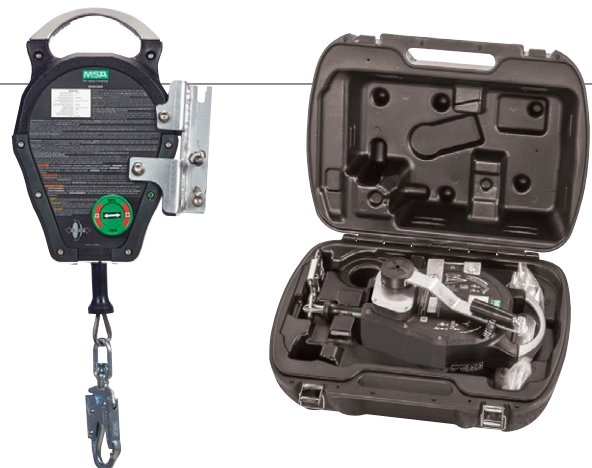

MSA Australia Pty Ltd  
 11 Columbia Way  
 Northwest Business Park  
 Baulkham Hills NSW 2153  
 PO Box 7325  
 Phone : 61 2 9688 0333  
 Customer Service : 1300 728 672  
 Fax : (02) 9896 1835  
 E-mail: aus.customerservice@MSAsafety.com

Note: This Bulletin contains only a general description of the products shown. While product uses and performance capabilities are generally described, the products shall not, under any circumstances, be used by untrained or unqualified individuals. The products shall not be used until the product instructions/user manual, which contains detailed information concerning the proper use and care of the products, including any warnings or cautions, have been thoroughly read and understood. Specifications are subject to change without prior notice.

MSA operates in over 40 countries worldwide. To find an MSA office near you, please visit [MSAsafety.com/offices](https://www.MSAsafety.com/offices).